



Product Specifications

981a-NEW

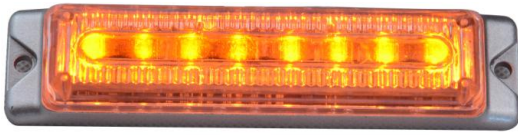


ITEM	POWER	VOLTAGE	LED	COLOR	LENS	FLASH PATTERNS	OPERATING TEMPERATURE	METAL COLOR	MOUNTING
981a-NEW	10W	10-28VDC	8PCS 3W	Amber Blue Red Green Purple White	Linear lens	18	-30 to 70°C	Silver / Black	Surface mount / Bracket mount


DIMENSIONS:

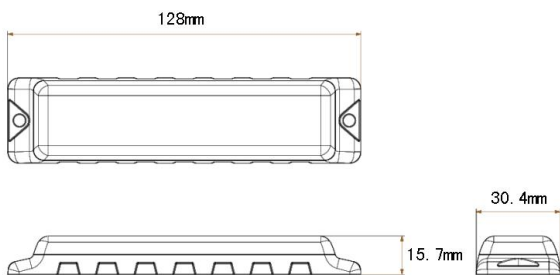

MOUNTING:

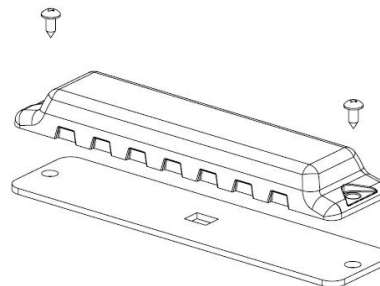

WIRING:

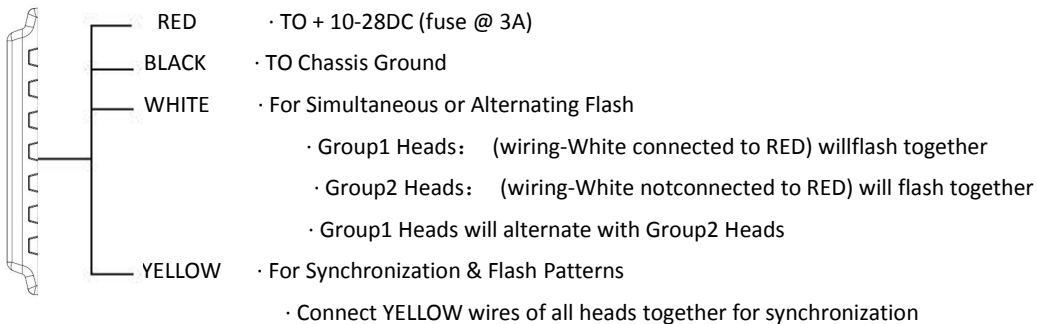

FLASH PATTERN:

- | | | | |
|----------------------------|---------------------------------|----------------------------------|---------------------------|
| 0. <u>Random (default)</u> | 6. <u>Ultra (split)</u> | 12. <u>Quint (all)</u> | 18. <u>Steady 4 (all)</u> |
| 1. <u>Single (split)</u> | 7. <u>Single - Quad (split)</u> | 13. <u>Mega (all)</u> | |
| 2. <u>Double (split)</u> | 8. <u>Single H/L(split)</u> | 14. <u>Ultra (all)</u> | |
| 3. <u>Quad (split)</u> | 9. <u>Single (all)</u> | 15. <u>Single-Quad (all)</u> | |
| 4. <u>Quint (split)</u> | 10. <u>Double (all)</u> | 16. <u>Single H/L(all)</u> | |
| 5. <u>Mega (split)</u> | 11. <u>Quad (all)</u> | 17. <u>Steady 2 (california)</u> | |

To select Flash Pattern,apply +12V to YELLOW wire:
 .for more than 1 second for previous pattern

.for less than 1 second next pattern
 .for more than 5 seconds for reset to default