

Product Specifications

# LH-je001



horizontal mount




vertical mount


<b>Model</b>	LH-je001		<b>Physical Characteristics</b>	<b>Colour Available</b>	Amber,Blue,Red,Green,Purple,White
<b>Light Characteristics</b>	<b>LED Power</b>	6 pcs of 3w LEDs		<b>Ambient temperature</b>	-30--+70°C
	<b>LED Lifespan</b>	100000		<b>Mounting</b>	Bracket mount
	<b>Flash settings</b>	1~4Hz		<b>Flash patterns</b>	18
	<b>Lens</b>	Tir lens		<b>Meet and Exceeds</b>	142mm L×34mm W×32mm H
<b>Electrical Characteristics</b>	<b>Voltage</b>	DC 10~28V	<b>Product Dimension</b>	129mm L×16.5mm W×27mm H	
	<b>Max Power</b>	9W	<b>Net Weight / Gross Weight</b>	0.13 KG / 0.2 KG	

\* All accessories are water, humidity, corrosion and emission resistant, flame retardant, and environmental-friendly. Materials used fully comply with the ROHS regulations.


**DIMENSIONS:**

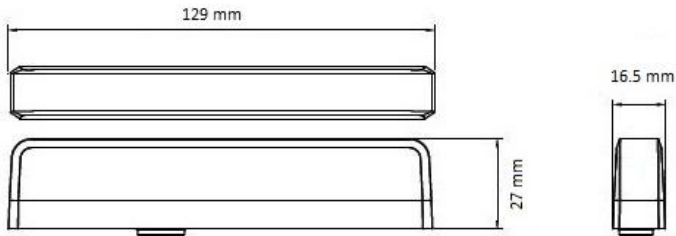

**MOUNTING:**

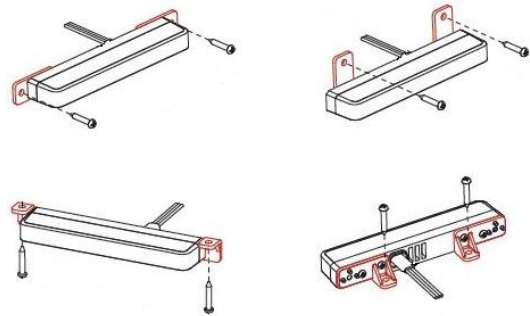

**WIRING:**

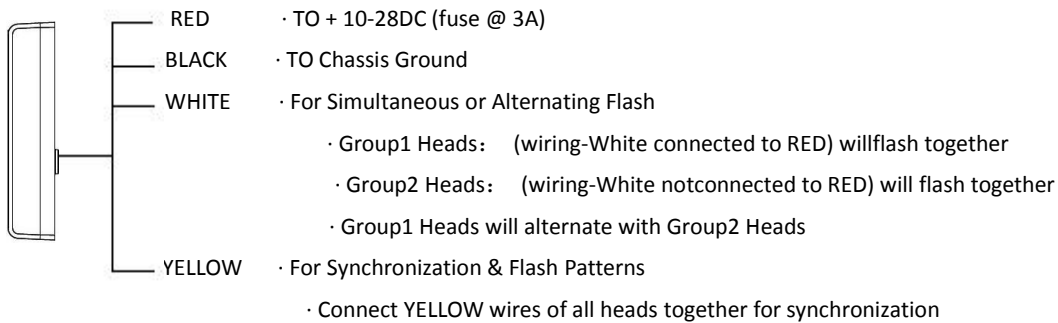

**FLASH PATTERN:**

- |                            |                                 |                                  |                           |
|----------------------------|---------------------------------|----------------------------------|---------------------------|
| 0. <u>Random (default)</u> | 6. <u>Ultra (split)</u>         | 12. <u>Quint (all)</u>           | 18. <u>Steady 4 (all)</u> |
| 1. <u>Single (split)</u>   | 7. <u>Single - Quad (split)</u> | 13. <u>Mega (all)</u>            |                           |
| 2. <u>Double (split)</u>   | 8. <u>Single H/L(split)</u>     | 14. <u>Ultra (all)</u>           |                           |
| 3. <u>Quad (split)</u>     | 9. <u>Single (all)</u>          | 15. <u>Single-Quad (all)</u>     |                           |
| 4. <u>Quint (split)</u>    | 10. <u>Double (all)</u>         | 16. <u>Single H/L(all)</u>       |                           |
| 5. <u>Mega (split)</u>     | 11. <u>Quad (all)</u>           | 17. <u>Steady 2 (california)</u> |                           |

To select Flash Pattern,apply +12V to YELLOW wire:  
 .for more than 1 second for previous pattern

.for less than 1 second next pattern  
 .for more than 5 seconds for reset to default