




Product Specifications

# T3




Model	T3		Colour Available	Amber,Blue,Red,Green,Purple,White	
Light Characteristics	LED Power	3 pcs of 3w LEDs	Physical Characteristics	Ambient temperature	-30--+70°C
	LED Lifespan	100000		Mounting	Surface mount / Bracket mount
	Flash settings	1~4Hz		Flash patterns	18
	Lens	LINEAR LENS		Packing size	88mm L×34mm W×34mm H
Electrical Characteristics	Voltage	DC 10~28V	Product Dimension	79mm L×23mm W×20.5mm H	
	Max Power	6.75W	Net Weight / Gross Weight	0.08KG / 0.09KG	


DIMENSIONS:

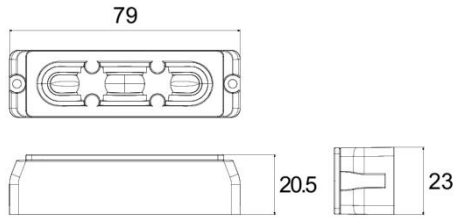

MOUNTING:

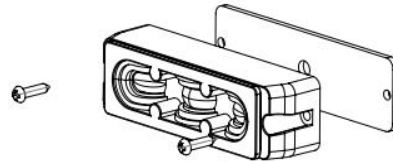

WIRING:

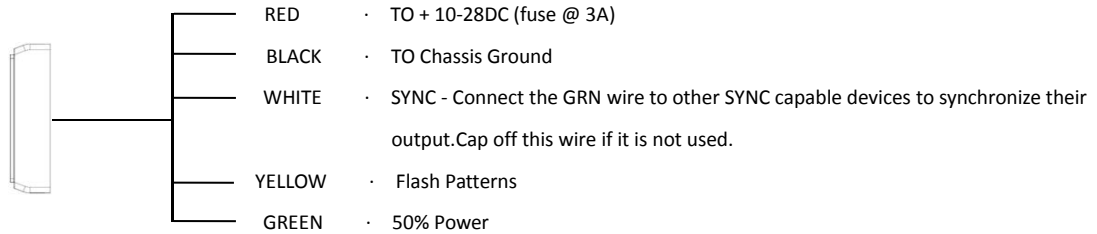

FLASH PATTERN:

SYNC Patterns

- |                         |                         |                     |
|-------------------------|-------------------------|---------------------|
| 1. Signal Alert™75 PH.1 | 5. Double Flash 75 PH.1 | 9.Com Alert™ PH.1   |
| 2. Signal Alert 75 PH.2 | 6.Double Flash 75 PH.2  | 10.Com Alert PH.2   |
| 3. Comet Flash@75 PH.1  | 7.Single Flash 75 PH.1  | 11.Long Burst™ PH.1 |
| 4. Comet Flash 75 PH.2  | 8.Single Flash 75 PH.2  | 12.Long Burst PH.2  |

Non-SYNC Patterns

- 13.Ping Pong™ PH.1
- 14.Ping Pong PH.2
- 15.Single Flash 60
- 16.Single Flash 90
- 17.Single Flash 120
- 18.Single Flash 300
- 19.Double Flash 150
- 20.Com Alert 150
- 21.Action Flash™1
- 22.Action Flash 2
- 23.Modu Flash™
- 24.Action Scan™

Phase Operation

Phase 1 (PH.1)flashes simultaneously with PH.1  
 Phase 2 (PH.2)flashes simultaneously with PH.2  
 PH.1 alternates with PH.2

To select Flash Pattern,apply +12V to YELLOW wire:

.for less than 1 second next pattern

.TO CHANGE THE DEFAULT PATTERN:When the desired pattern is displayed,allow it to run

For more than 5 seconds.The light head will now display this pattern when initially activated.