

### **Product Specifications**

# **T4**






LINEAR LENS


**TIR LENS** 

| Model                      | T4             |                   |                           | Colour Available       | Amber,Blue,Red,Green,Purple,White |
|----------------------------|----------------|-------------------|---------------------------|------------------------|-----------------------------------|
| Light Characte ristics     | LED Power      | 4 pcs of 3w LEDs  | Physical Chara cteristics | Ambient temperature    | -30+70°C                          |
|                            | LED Lifespan   | 100000            |                           | Mounting               | Surface mount / Bracket mount     |
|                            | Flash settings | 1~4Hz             |                           | Flash patterns         | 18                                |
|                            | Lens           | LINEAR / TIR LENS | Packing size              | 104mm L×34mm W×34mm H  |                                   |
| Electrical Characteristics | Voltage        | DC 10~28V         | Product Dimension         | 96mm L×23mm W×20.5mm H |                                   |
|                            | Max Power      | 9W                | Net Weight / Gross Weight | 0.1KG / 0.11KG         |                                   |


#### **DIMENSIONS:**

#### MOUNTING:





## WIRING:

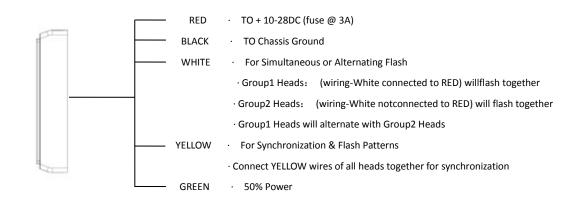

#### FLASH PATTERN:

| 0. Random (default) | 6. Ultra (split)         | 12. Quint (all)           | 18. <u>Steady 4 (all)</u> |
|---------------------|--------------------------|---------------------------|---------------------------|
| 1. Single (split)   | 7. Single - Quad (split) | 13. <u>Mega (all)</u>     |                           |
| 2. Double (split)   | 8. Single H/L(split)     | 14. <u>Ultra (all)</u>    |                           |
| 3. Quad (split)     | 9. Single (all)          | 15. Single-Quad (all)     |                           |
| 4. Quint (split)    | 10. Double (all)         | 16. Single H/L(all)       |                           |
| 5. Mega (split)     | 11. Quad (all)           | 17. Steady 2 (california) |                           |

To select Flash Pattern, apply +12V to YELLOW wire:

.for less than 1 second next pattern

.for more than 1 second for previous pattern

.for more than 5 seconds for reset to default